


2" Elima-Matic Bolted Aluminum – ATEX

PERFORMANCE CURVE

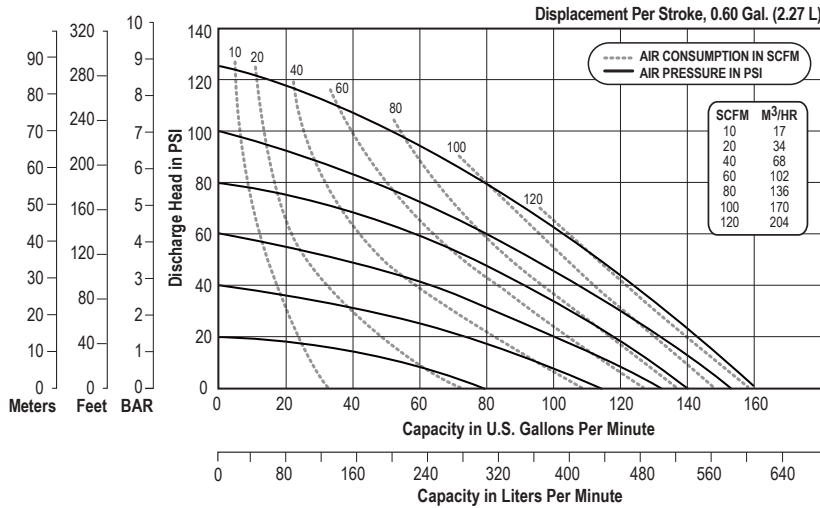

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

with Metal Center Section

SPECIFICATIONS

Flow Rate

Adjustable to . . .0-163 gpm (617 lpm)

Port Size

Suction2" NPT

Discharge2" NPT

Air Inlet1/2" NPT

Air Exhaust1" NPT

Suction Lift

Dry18' (5.5 m)

Wet32' (9.8 m)

Max Solid Size (Diameter)



.7/16" (11.1 mm)

Max Noise Level 92 dB(A)

Shipping Weights

Aluminum 81 lbs (36.7 kg)

DIMENSIONS

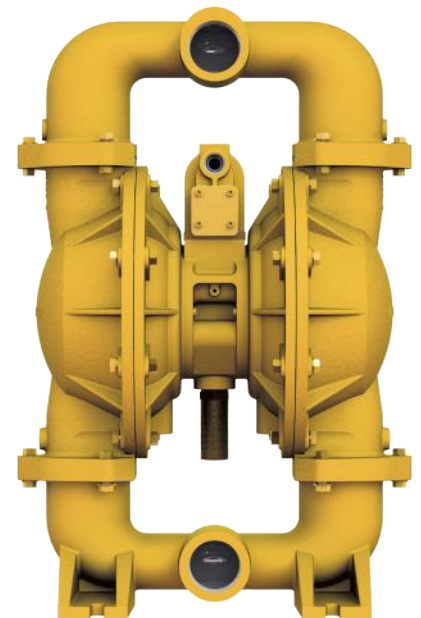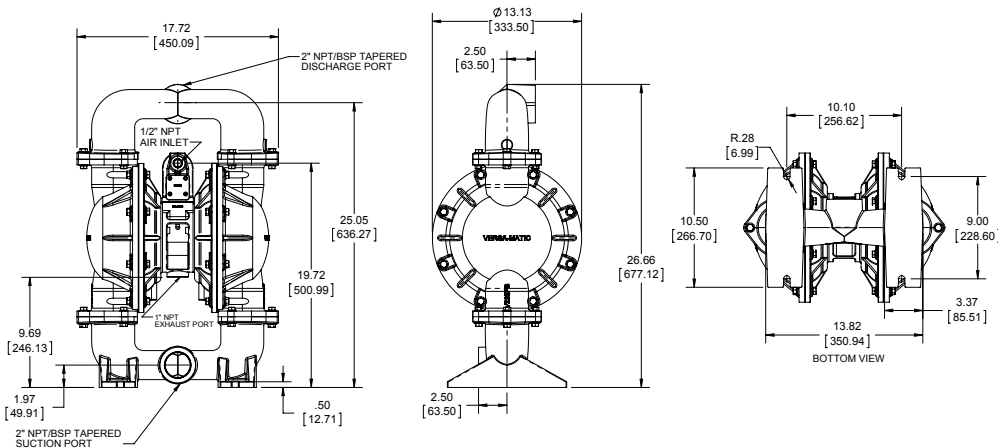

VERSAMATIC®
E2 DATA SHEET